

CONNIE COherent Neutrino Nucleus Interaction Experiment

Carla Bonifazi for the CONNIE collaboration



Motivation



- Coherent Neutral Current Neutrino–Nucleus interaction:
 - for neutrino energies below 50 MeV
 - SM prediction but never measured!
 - new tool for neutrino experiments (very short baseline oscillation experiments – low energy)
 - MeV-neutrino physics has great relevance for energy transport in supernovas
 - monitor nuclear reactors through their emitted neutrinos
- Unique features of high resistivity CCDs designed by Berkeley Laboratories:
 - very low energy threshold detectors: 5.5 eV ($\sigma_{RMS} \sim 1.5 \text{ e}^{-}$)
 - large mass compared to regular CCDs
 - "3D" information: event reconstruction
 - used in the Dark Energy Survey (DES) experiment and Dark Matter in CCDs (DAMIC) experiment

Neutrino Interaction with Matter



In the coherent neutrino-nucleus neutral-current inter- action, a neutrino of any flavor scatters off a Si nucleus transferring some energy in the form of a nuclear recoil.

atomic number neutron number of the nucleus of the nucleus mass of the nucleus
$$\frac{d\sigma}{dE_{\rm rec}dE_{\overline{\nu}_e}} = \frac{G_F^2}{8\pi} \left(Z \right) 4\sin^2\theta_W - 1 \right) + N^2 M \left(2 - \frac{E_{\rm rec}M}{E_{\overline{\nu}_e}^2} \right) |f(q)|^2$$

f(q) is the nuclear form factor at momentum transfer q

For $E_{\overline{\nu}_e}$ < 50 MeV the momentum transfer (q²) is small q²R² < 1 (R = the radius of the nucleus) $|f(q)| \approx 1$ within an uncertainty of a few percent

Neutrino Interaction with Matter





In the coherent neutrino-nucleus neutral-current inter- action, a neutrino of any flavor scatters off a Si nucleus transferring some energy in the form of a nuclear recoil. G_{-}^{2}

 $\sigma_T(E_{\overline{\nu}_e}) = \frac{G_F^2}{4\pi} \left[Z(4\sin^2\theta_W - 1) + N \right]^2 E_{\overline{\nu}_e}^2$

 $\sigma_T(E_{\overline{\nu}_e}) \approx 4.22 \ 10^{-45} N^2 E_{\overline{\nu}_e}^2$

Total reactor antineutrino spectrum in the reactor per MeV

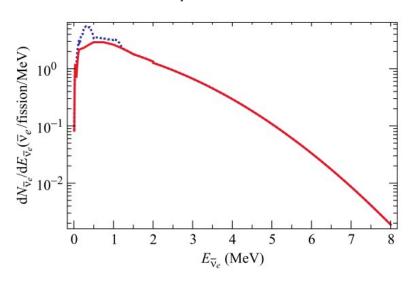


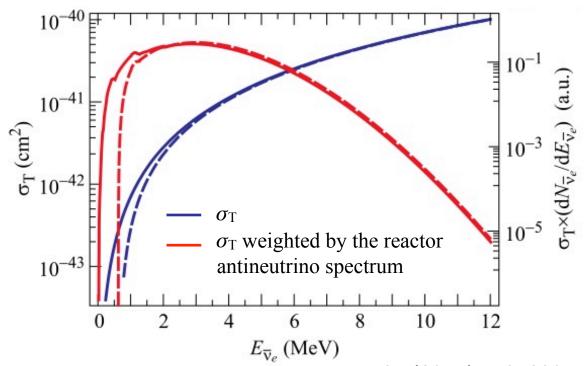


PRD91 (2015) 7, 072001

Charge Coupled Device



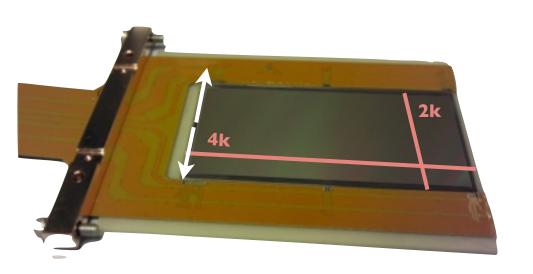




- Scientific CCDs developed by LBNL microsystems LAB
 - pixel size of 15 μ m X 15 μ m
 - thicker than most CCDs (250/675 μ m)
 - up to 5.2 gr/CCD
 - diffusion → 3D reconstruction → rejection of surface events
 - CCDs cooled to 140 K to achieve readout noise RMS < 2 e⁻
 - Energy threshold of ~0.05 keVee

Charge Coupled Device



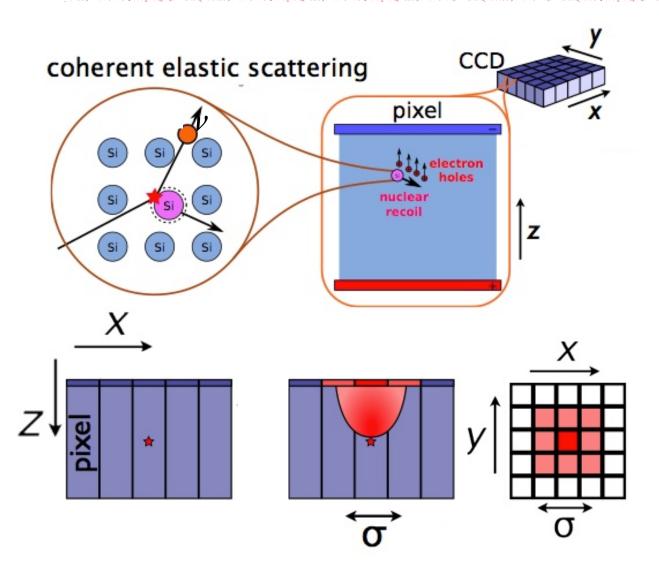

The scattering of the ν with a Si nucleus leads to ionization


Charge carriers are drifted along z direction and collected at CCD gates

Charge diffuses as it travels

We fit to the radial spread of the cluster to estimate its position in z within the CCD bulk

CCD readout




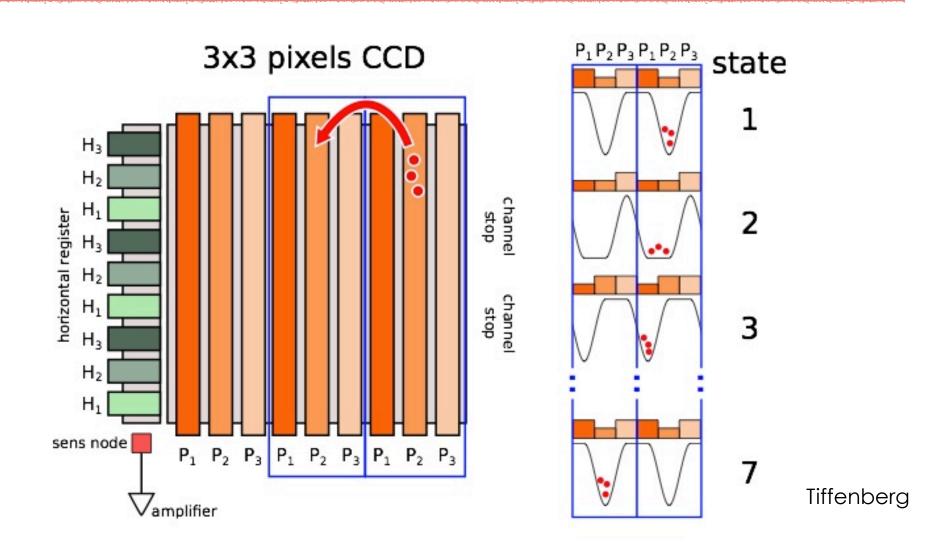


Capacitance of the system is set by the sens node: $C = 0.05 \text{ pF} \Rightarrow 3\mu\text{V/e}$

CCD readout - Noise

- Added to each pixel by the output amplifier during the charge packet readout
- Gaussian distribution with σ_{RMS} that depends on the readout time of the pixel
- Pixel time = $30 \,\mu s \Rightarrow \sigma_{RMS} = 1.5e$ = 5.5 eV of ionization energy

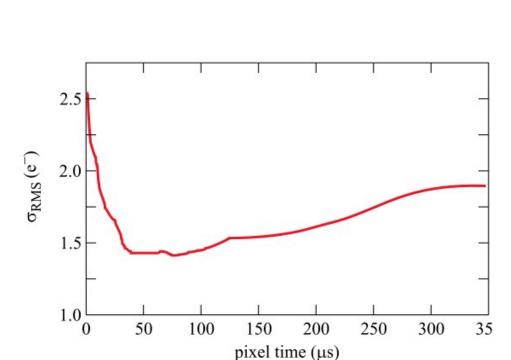


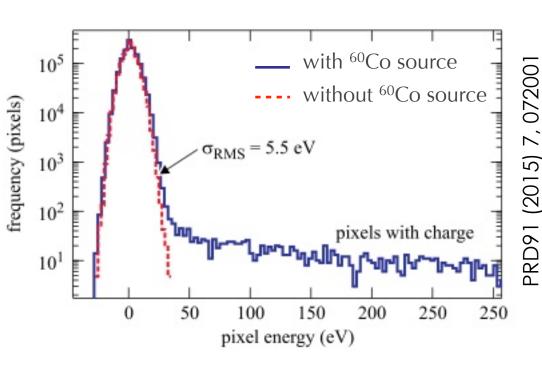

Janesick


Particle identification CCD




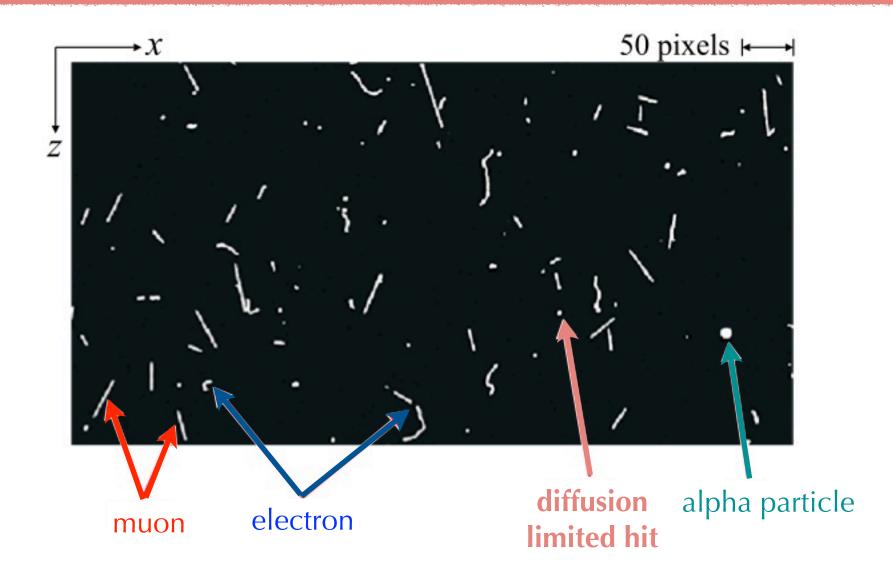



CCDs calibration with X-rays





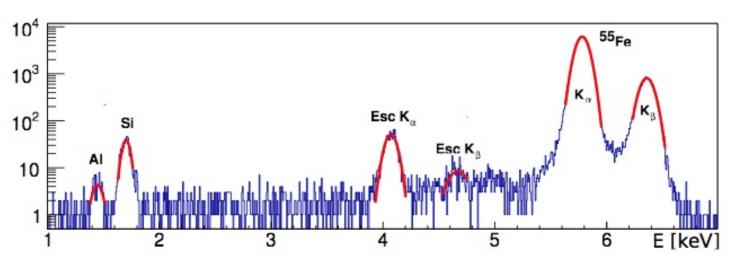


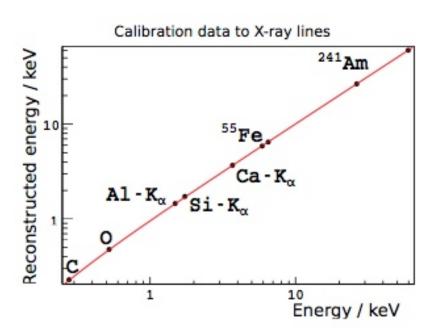

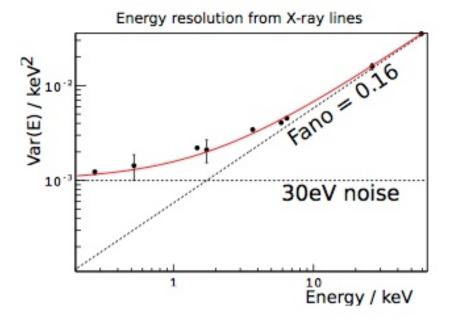

Diffusion



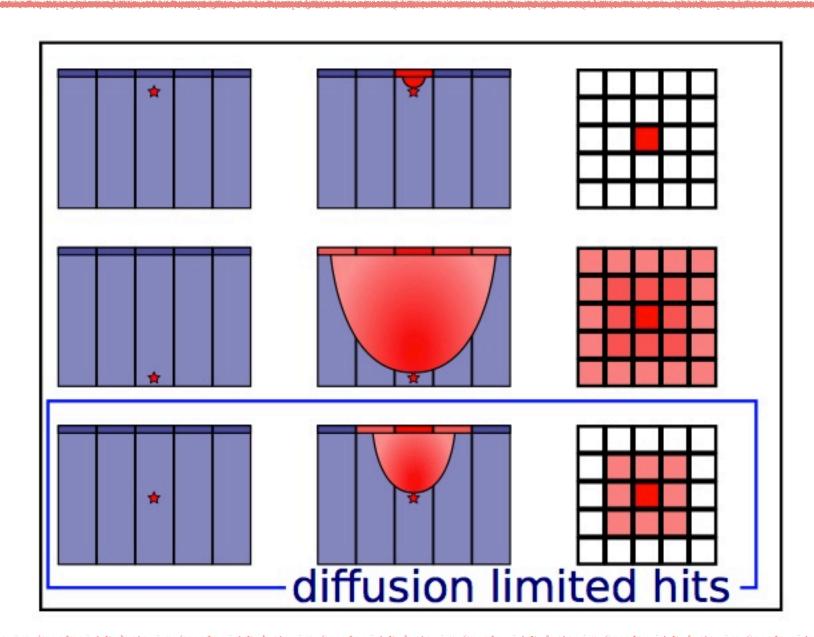


Tiffenberg

Diffusion from data




Using the muon track in the CCD

Recorded track: CCD top view

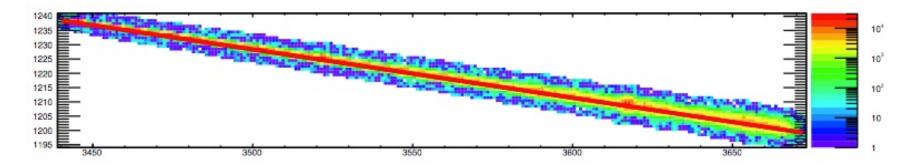

CCD side view

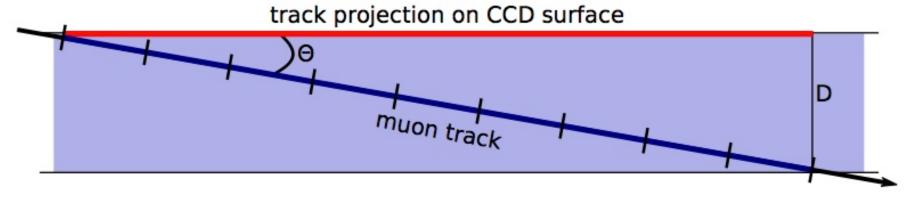



Tiffenberg

Diffusion from data



Diffusion can be measured as a function of the interaction depth No need to rely on models.

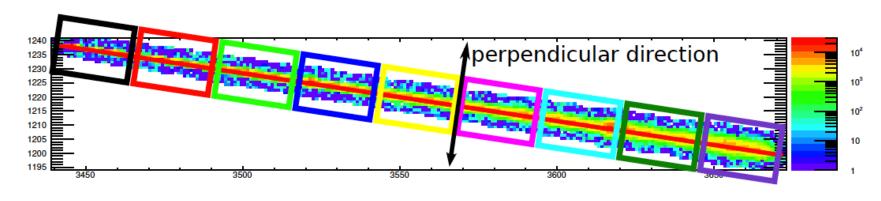


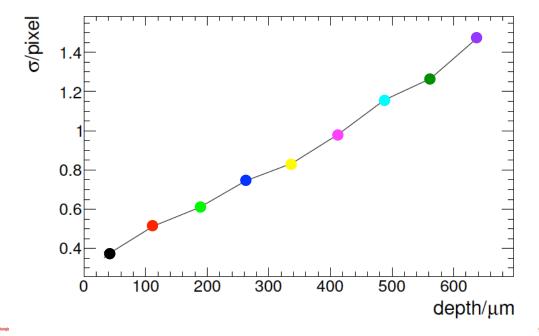

Tiffenberg

Diffusion from data



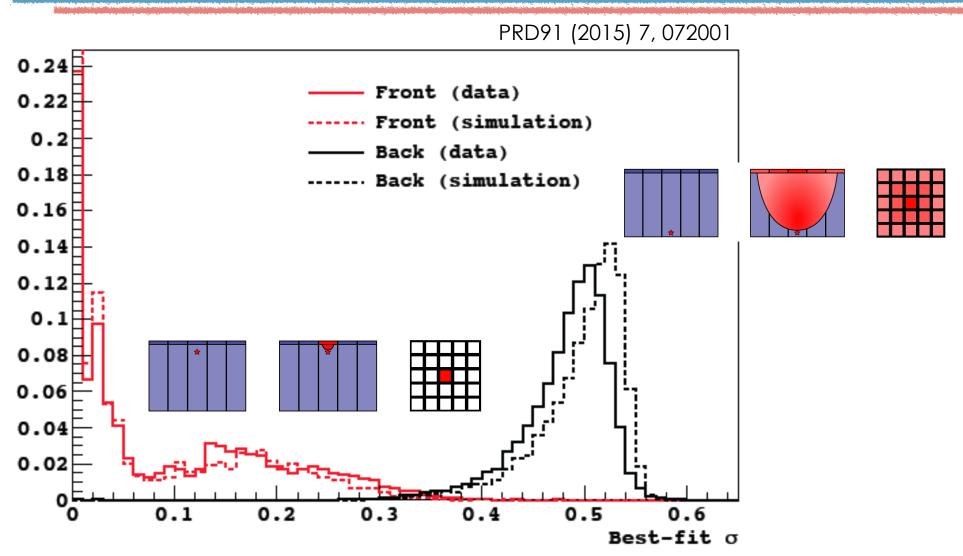

Diffusion can be modeled with a Gaussian distribution with lateral deviation from 0 to 0.55 pixels.

Angra Nuclear Power Plant







Expected event rate for the Angra reactor



Energy spectra for expected events in silicon detectors

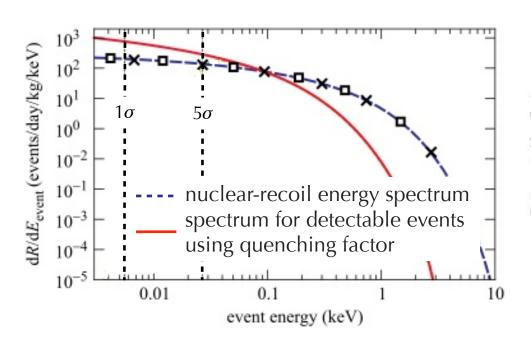

Total number of events as a function of the threshold energy for different constant quenching factors

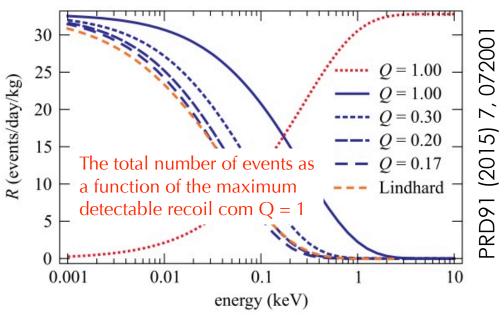

Expected number of events (event/kg/day)

$$Q = 0.20$$

$$E_{th} = 5.5 \text{ eV} (1\sigma_{RMS})$$

 $E_{th} = 28 \text{ eV} (5\sigma_{RMS})$

Forecast



- Assuming
 - 52 g detector array (10 CCDs with 650 μ m)
 - the background at sea level using passive shield can be reduced to ~600 events/keV/day/kg, i.e. 8.5 events/day
 - the rate of expected false positive is 3.18 events/day
- Expected running time for different CL for a detector's mass of 52 g

CL [%]	T (days)
80	12
90	28
95	45
98	70
99	150

• We need 150 days of running for a 3σ detection

PRD91 (2015) 7, 072001

CONNIE collaboration





Argentina Centro Atómico Bariloche Universidad del Sur / CONICET



Paraguay Universidad Nacional de Asunción



Brazil Centro Brasileiro de Pesquisas Físicas Universidade Federal do Rio de Janeiro



Switzerland University of Zurich



Mexico Universidad Nacional Autónoma de México



USA Fermilab National Laboratory

About 20 people

Timeline




- First visit in 2011
- Seriously making a plan in 2013
- Installed a prototype in 2014
 - Detector Shipping August-September 2014
 - Detector installation and first data October-November 2014 (10 grams)
 - Initial operations supported by experts (from USA and Mexico)
 - Continuous operation now supported by local team (Brazil)
 - Full shield assembly completed July-August 2015
 - August-September 2015 more than a full month with reactor ON
 - September-October 2015 full month of full reactor OFF
- Upgrade to 100 g mass detector (CONNIE100)

The detector



During the installation (Oct-Nov/2014)

Monsoon readout system

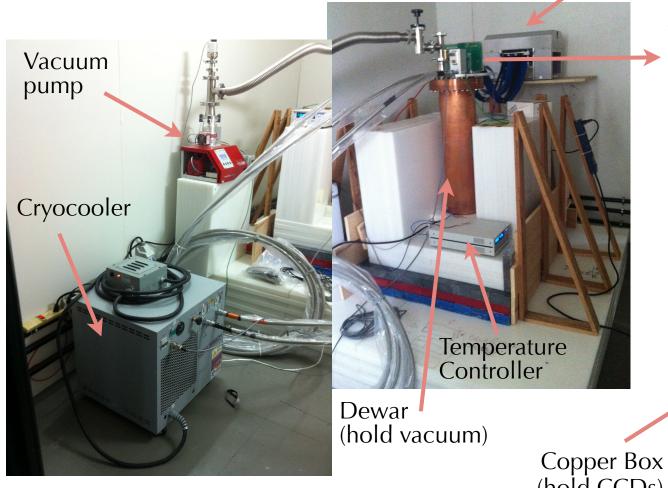


ViB board (signals transport)

(hold CCDs)

The detector

During the installation (Oct-Nov/2014)

CCDs in the copper box







Dewar

(hold vacuum)


15 cm lead



Copper Box




Polyethylene inside (at the bottom)



The detector – First light



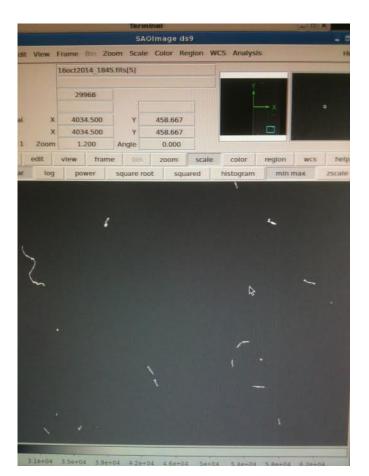



Phase I: Partial shield (30 cm polyethylene and 5 cm lead)


4 CCDs installed and taking data for background studies since Dec/2014


The detector – Full shied



1.75 m

Phase II: Full shield (installed July-August 2015)

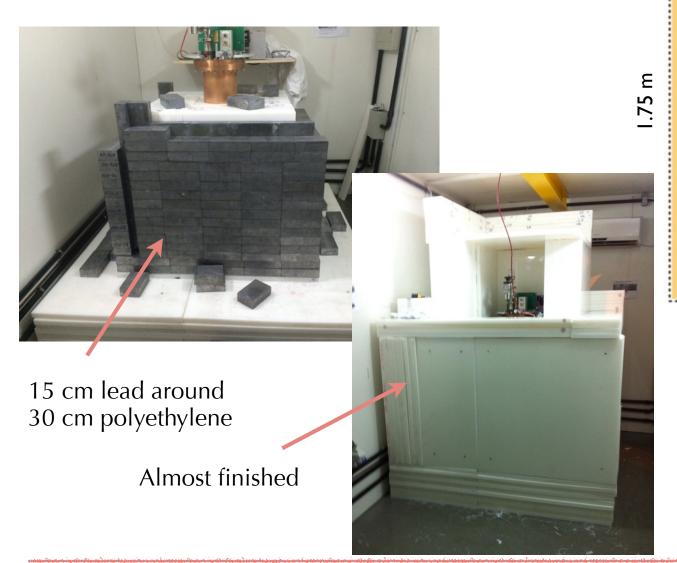

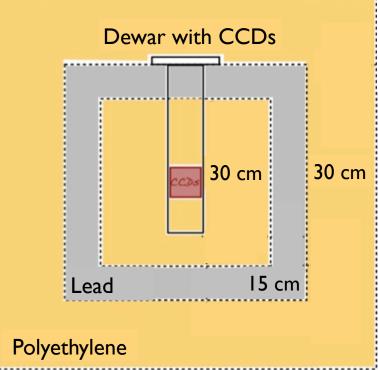

Original design


The detector – Taking data





The detector – Images



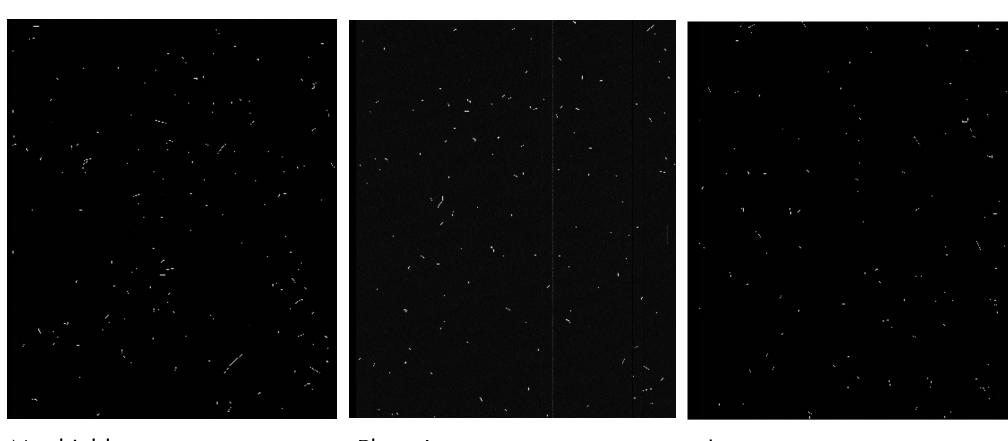

No shield Phase I Phase II

Summary



- CCDs can be used as particle detectors with good resolution and very low electronic noise
- Capability to detect nuclear recoils (DAMIC, CONNIE)
- Can be used to detect coherent neutrino-nucleus interaction with reactor anti-neutrinos
- CONNIE now operating at Angra II nuclear power plant
- Run with/without shield and with power plant on/off in 2015 (paper will coming out this year with first results).
- Current setup is not expected to see coherent scattering, but will measure background and is demonstrating operations at Angra.
- Upgrade to 100g of active mass. We know what to do, we are moving in this direction.



CONNIE Collaboration Meeting

Coherent Neutrino-Nucleus Interaction Experiment




co.vnie

JUNE 9-12, 2015 - CBPF - RIO DE JANEIRO
















Sala Oliveira Castro Brazilian Center for Physics Research Rua Dr. Xavier Sigaud, 150



























Very exciting years to come Likely to open a new window for neutrino experiments

Thanks for your attention!